




# INSTALLATION INSTRUCTIONS FOR WALL MOUNT SOUNDERS TYPE EMA1224B4R/W

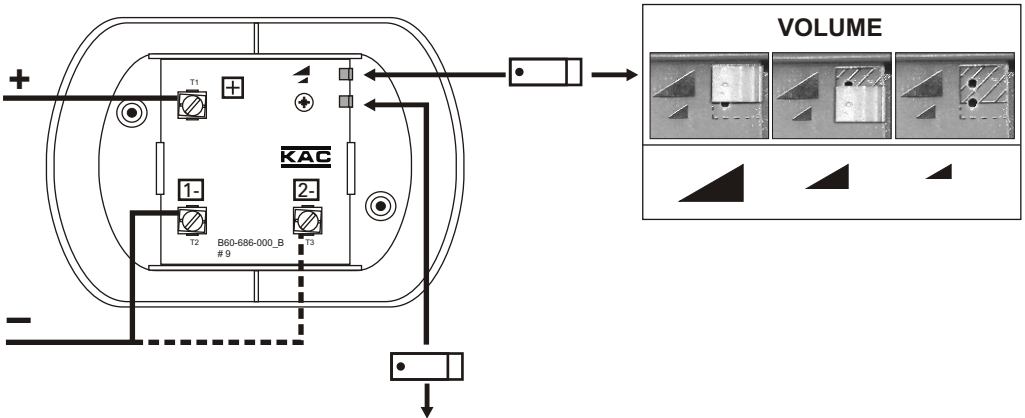

CONNECTION TERMINALS			LINK	TONE	
+	1-	2-	⊛		
✓	✓		✓	—	800Hz continuous
✓		✓	✓	⎓	800Hz/1000Hz alternating
✓	✓			—/—	500Hz/1200Hz slow whoop
✓		✓		⎓	800Hz DIN tone

## Specification

Voltage Range

12VDC (10V to 14V)  
24VDC (21V to 27V)

Output

max.103dB(A) @ 1mtr

Sounder Output data, in accordance with EN54-3, is available on request, or via the website (details overleaf).

Document ref: D 616.

Current

12mA @ 24VDC (800Hz continuous, High Volume)

Max wire size

2.5mm<sup>2</sup>

Temperature Range

-30 to +70° C(s subject to confirmation)



IP Rating

Meets the requirements of EN54-3, Type A IP21C

KAC Alarm Company Limited, Unit 15-19 Trescott Road, Redditch, B98 7AH, England.  
Tel: +44 (0) 1527 406655 Fax: +44 (0) 1527 406677 www.kac.co.uk



# INSTALLATION INSTRUCTIONS FOR WALL MOUNT SOUNDERS TYPE DBS1224B4W

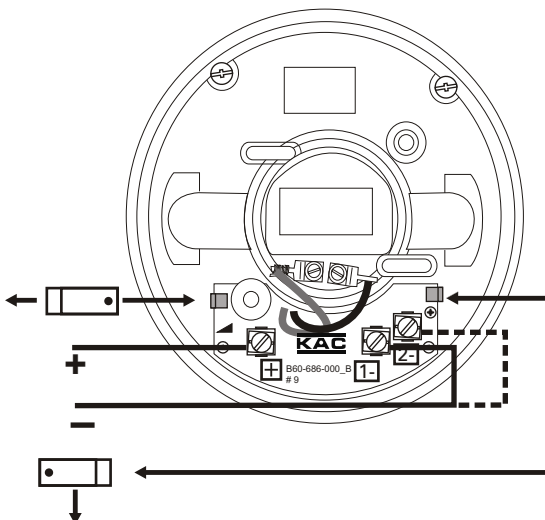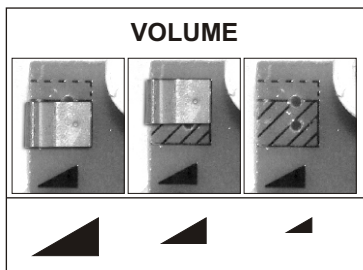

CONNECTION TERMINALS			LINK	TONE	
+	1-	2-	⊗		
✓	✓		✓	—	800Hz continuous
✓		✓	✓	⏏	800Hz/1000Hz alternating
✓	✓			—	500Hz/1200Hz slow whoop
✓		✓		⏏	800Hz DIN tone

## Specification

Voltage Range	12VDC (10V to 14V) 24VDC (21V to 27V)
Output	max.93dB(A) @ 1mtr
Current	12mA @ 24VDC (800Hz continuous, High Volume)
Max wire size	2.5mm <sup>2</sup>
Temperature Range	-30 to +70° C ( subject to confirmation)