




CONNECTION TERMINALS			LINK	TONE	
+	1-	2-	⊗		
✓	✓		✓	—	800Hz continuous
✓		✓	✓	⎓	800Hz/1000Hz alternating
✓	✓			—/—	500Hz/1200Hz slow whoop
✓		✓		⎓⎓⎓	800Hz DIN tone

Specification

Voltage Range	12VDC (10V to 14V) 24VDC (21V to 27V)
Output	max.103dB(A) @ 1mtr Sounder Output data, in accordance with EN54-3, is available on request, or via the website (details overleaf). Document ref: D 616.
Current	12mA @ 24VDC (800Hz continuous, High Volume)
Max wire size	2.5mm ²
Temperature Range	-30 to +70° C(s subject to confirmation)
IP Rating	Meets the requirements of EN54-3, Type A IP21C



INSTALLATION INSTRUCTIONS FOR WALL MOUNT SOUNDERS TYPE DBS1224B4W

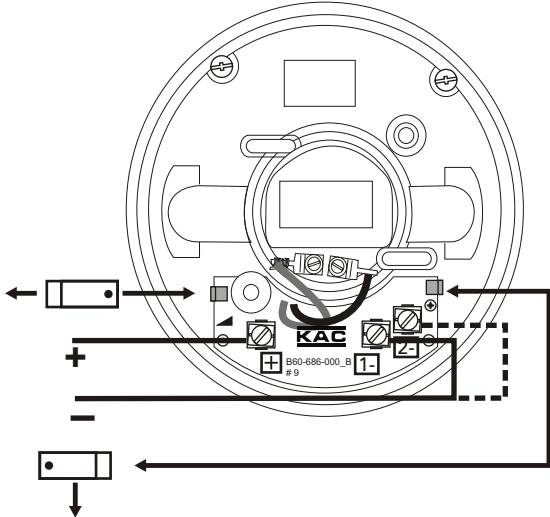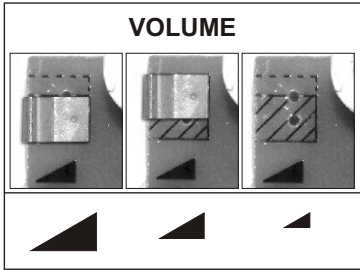

CONNECTION TERMINALS			LINK	TONE	
+	1-	2-	⊛		
✓	✓		✓	—	800Hz continuous
✓		✓	✓	⎓	800Hz/1000Hz alternating
✓	✓			—	500Hz/1200Hz slow whoop
✓		✓		⎓	800Hz DIN tone

Specification

Voltage Range 12VDC (10V to 14V)
 24VDC (21V to 27V)

Output max.93dB(A) @ 1mtr

Current 12mA @ 24VDC (800Hz continuous, High Volume)

Max wire size 2.5mm²

Temperature Range -30 to +70° C (subject to confirmation)